


Revision History  
Rev 2.0-B  
First draft



- Rev 3.3-A
1. Added push button for nHIB
  2. Added Murata Connector for RF test
  3. Added LED for nRESET
  4. Routed the VDD\_FLASH to 3.3V
  5. Moved the 100uF cap from VCC\_BRD to VBAT\_CC. Changed cap to 100uF ceramic from Tantalum
  6. Removed 0.1 Ohm resistor for current measurement by default
  7. Removed RS232 UART connection by default

- Rev 4.0-A  
=====
1. Added pull-up/down resistors for the serial flash
  2. Added pulls for all floating output pins
  3. Re-assigned J5 for nHIB for use in OOB demo
  4. Modified R12 to from 10K to 100K
  5. R13 is changed from 3.3K to 10K

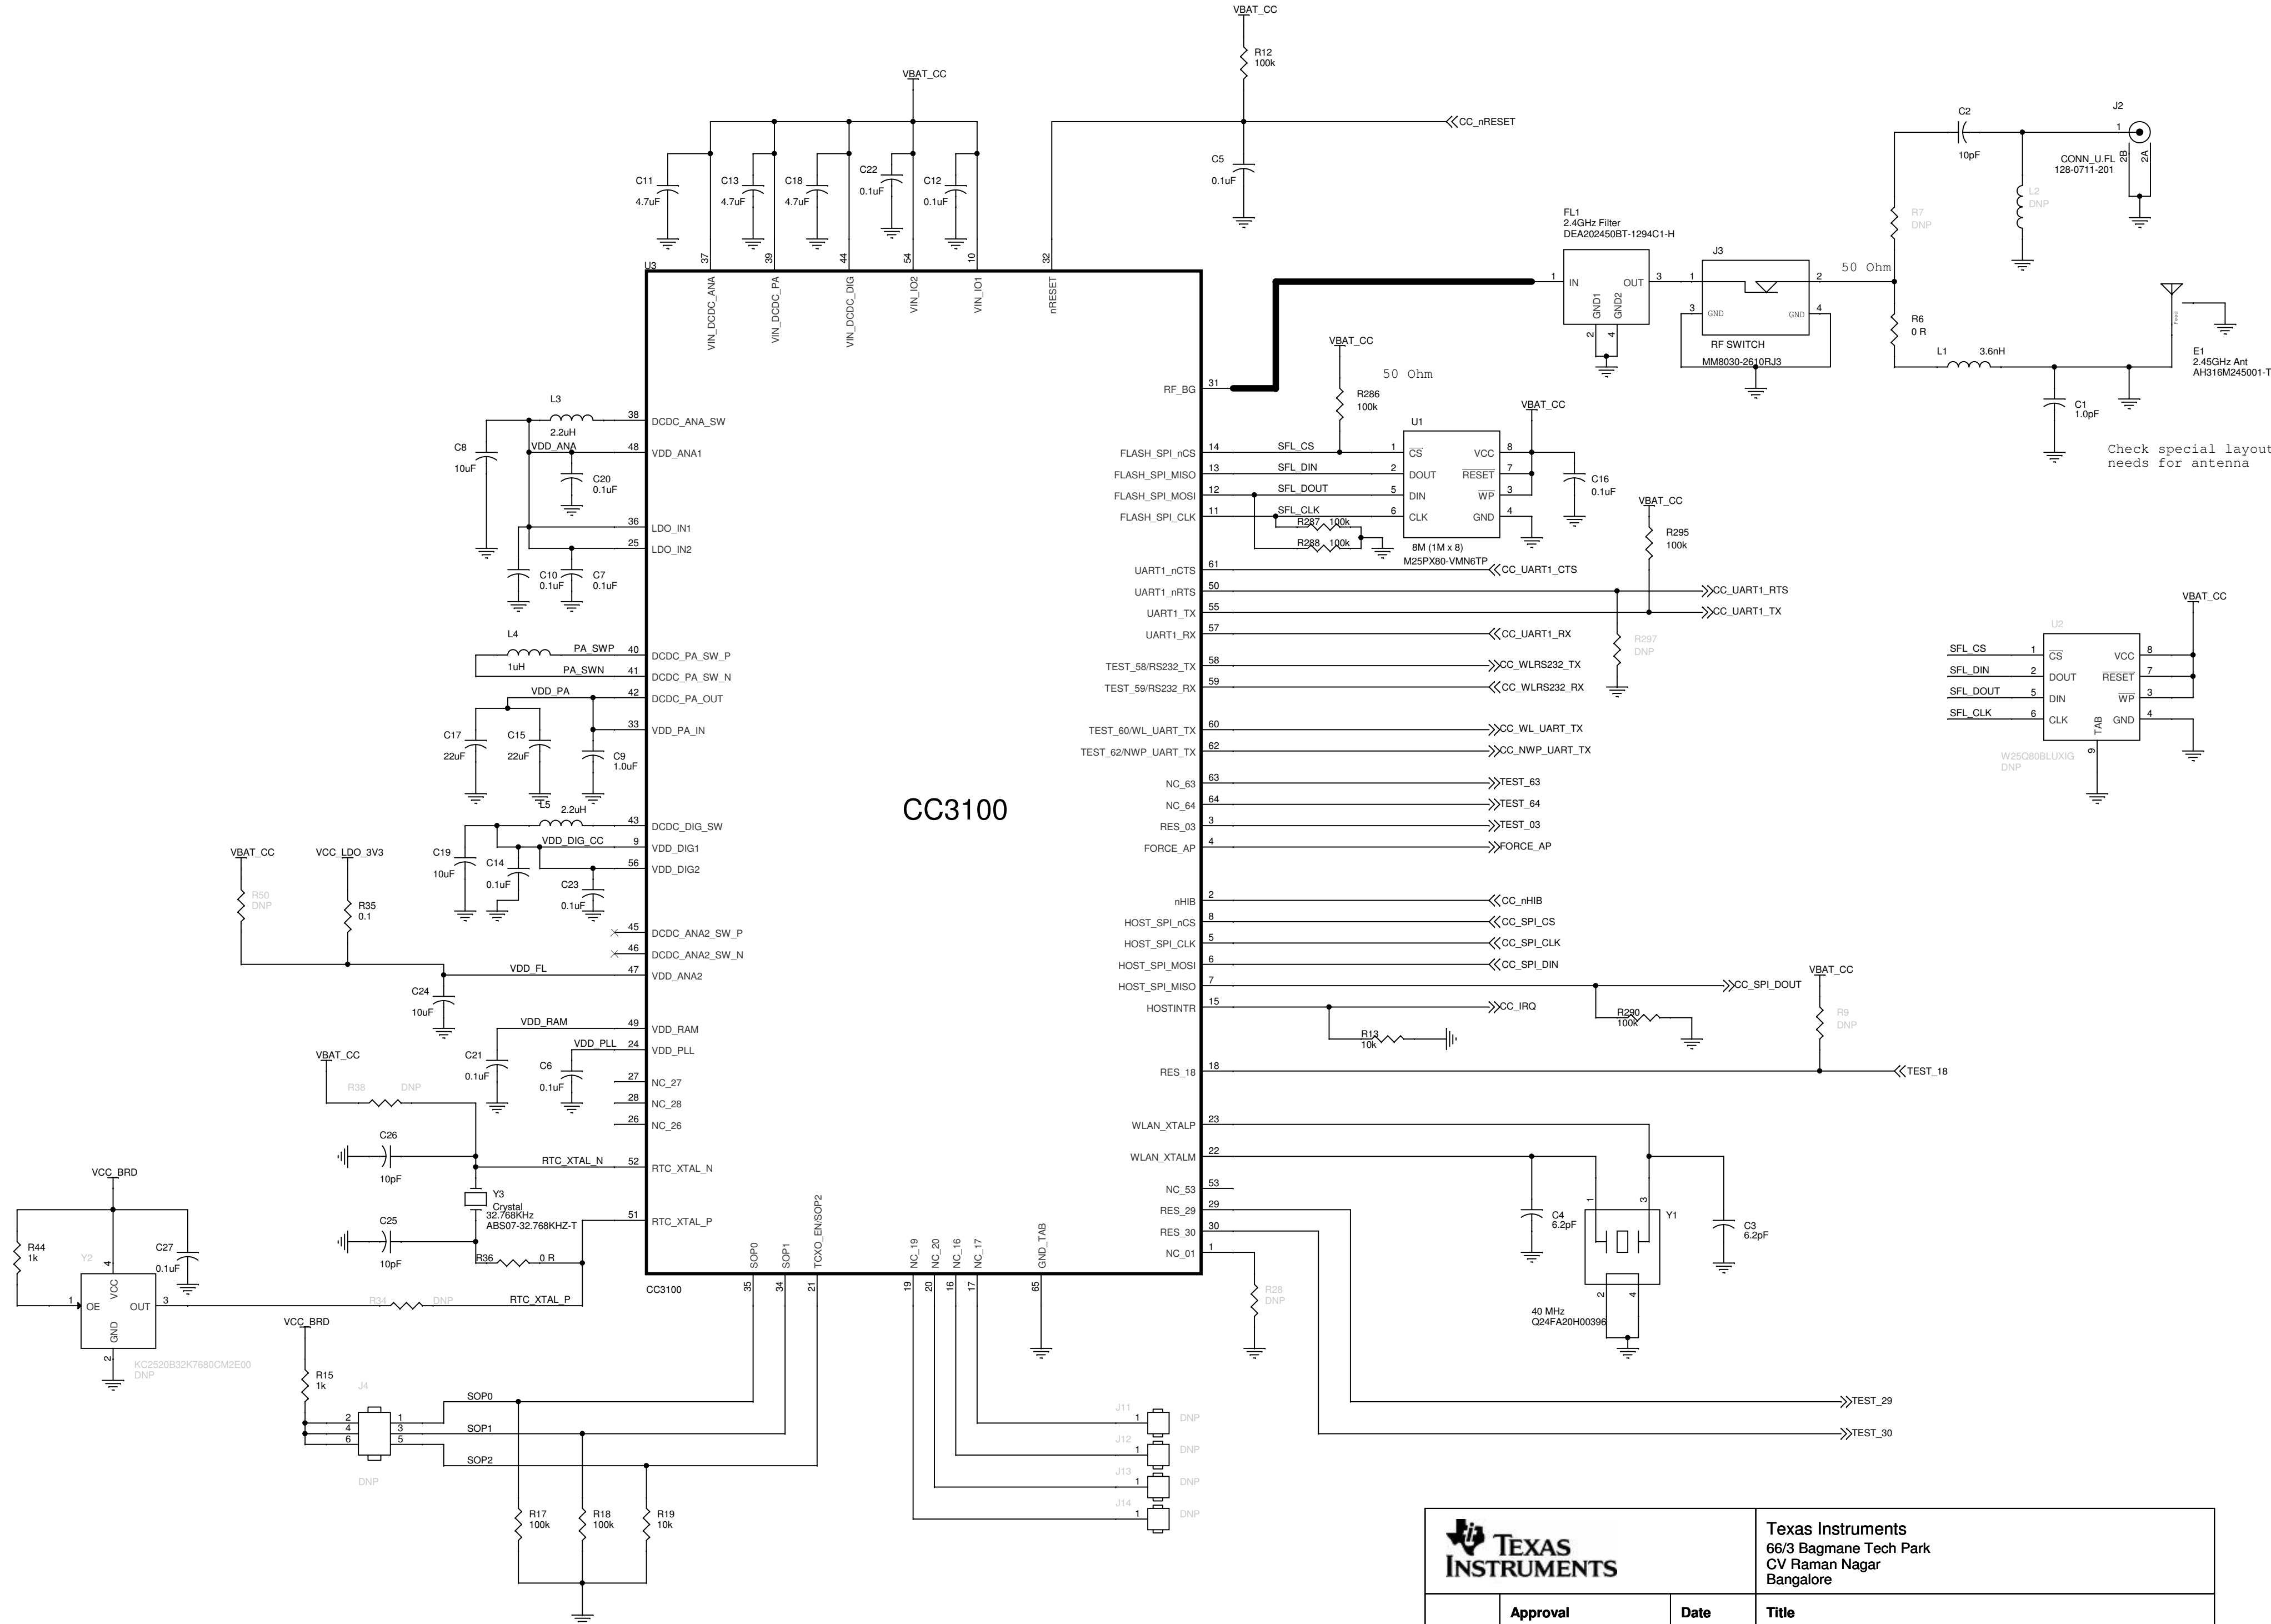


			Texas Instruments 66/3 Bagmane Tech Park CV Raman Nagar Bangalore		
	Approval	Date	Title CC3100BOOST		
Designer	Texas Instruments	Date			
Drawn By	TI	Date	Size A2	Project No <Project Number>	Rev 4.0- A
Layout	TI	Date	Scale	Date Thursday, June 05, 2014	Sheet 1 of 3


## LAUNCHPAD INTERFACE

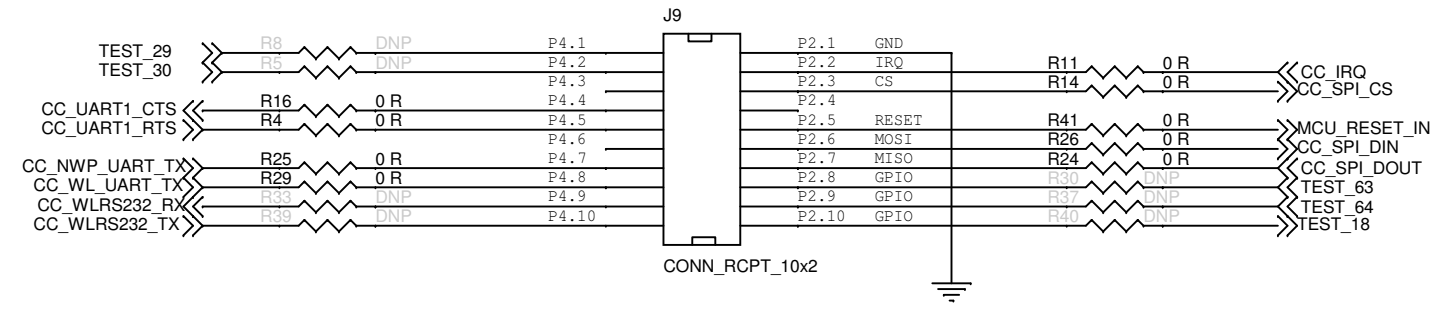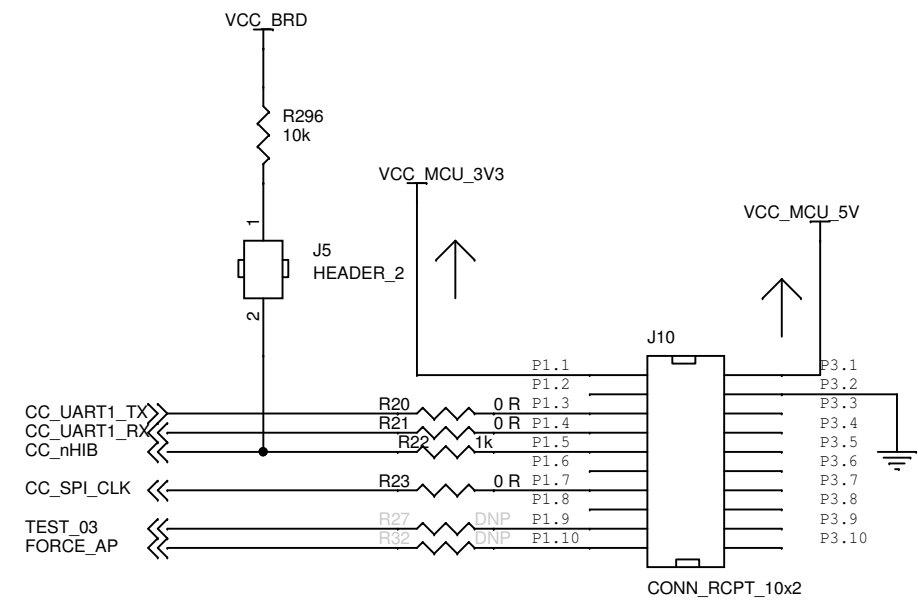


## POWER MANAGEMENT

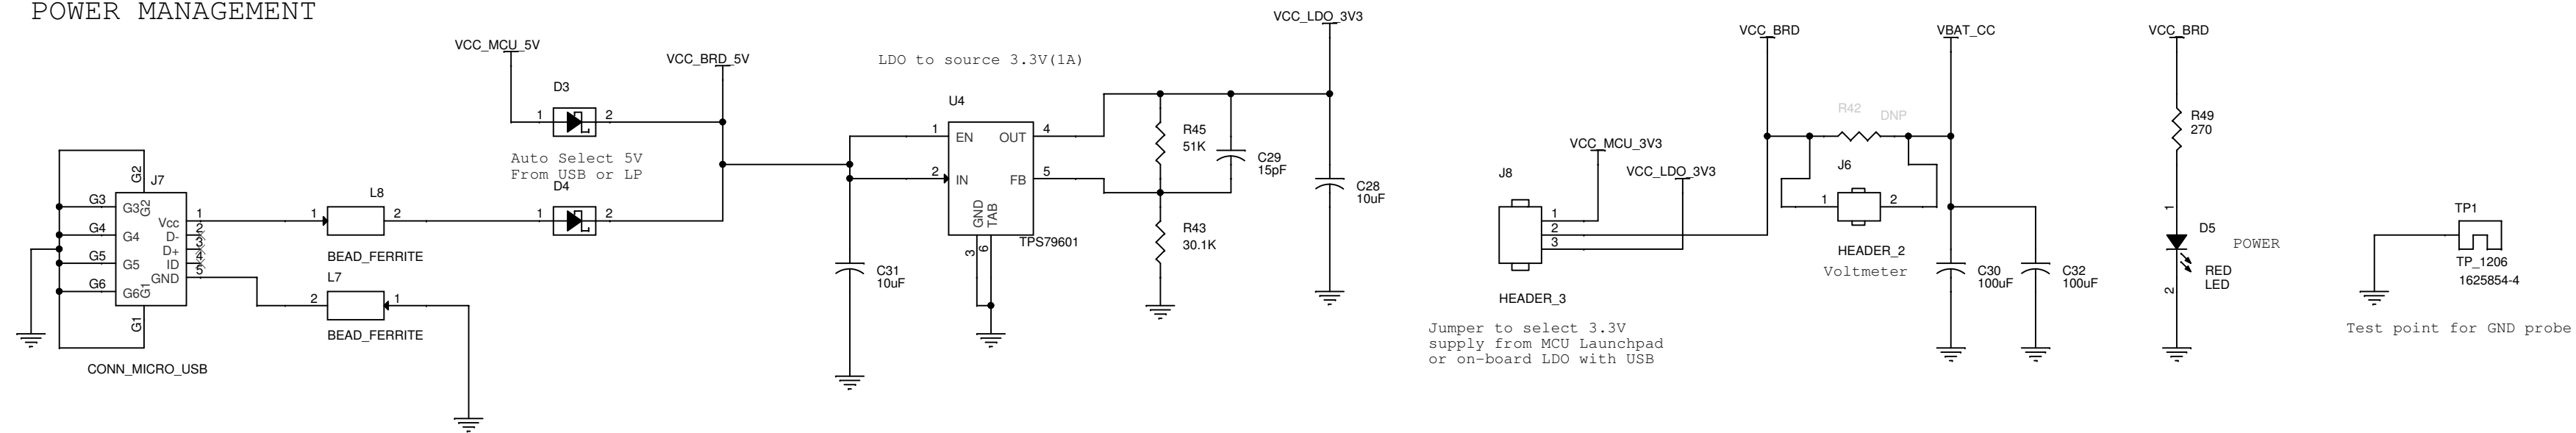


OOB DEMO

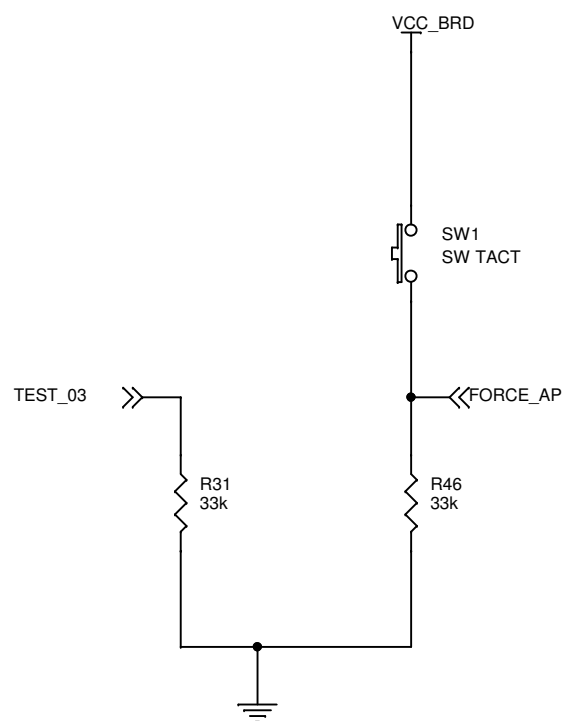


## PUSH BUTTONS

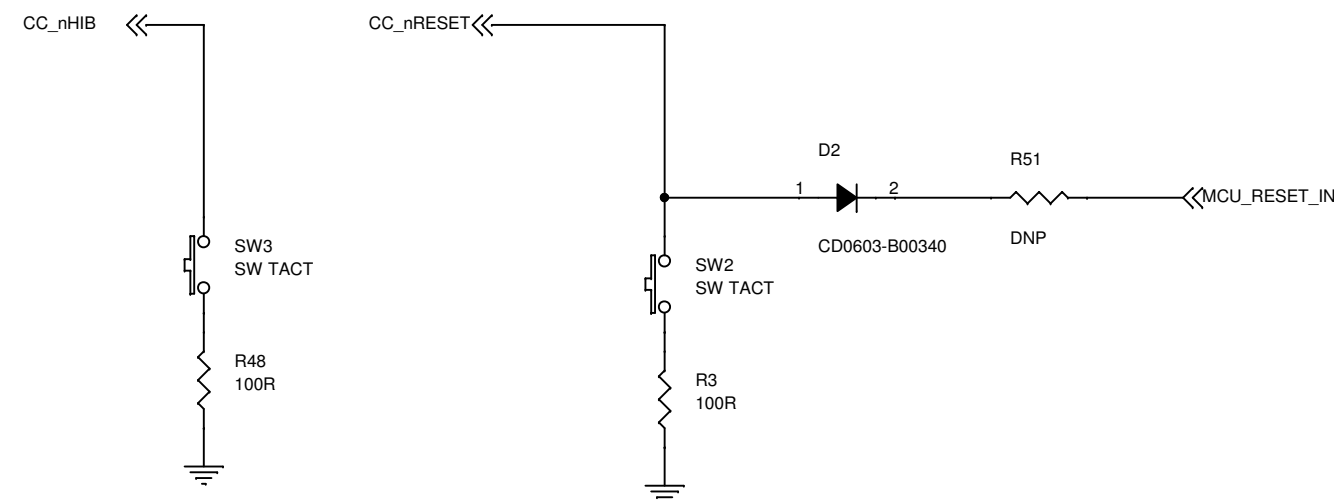

LEDs

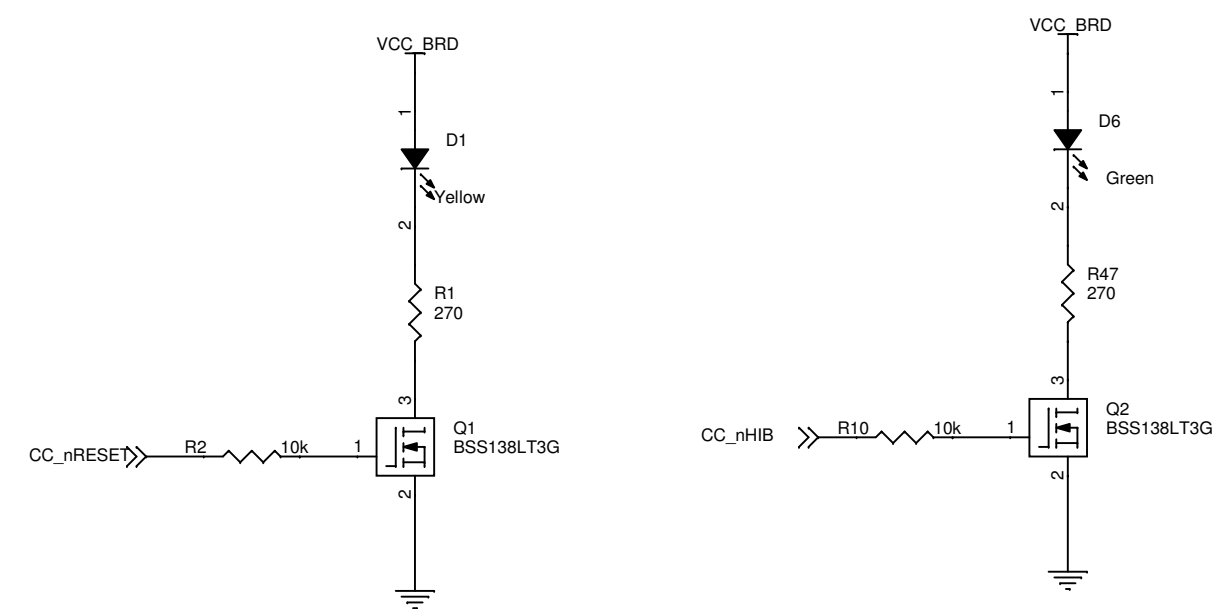

			Texas Instruments 66/3 Bagmane Tech Park CV Raman Nagar Bangalore		
	Approval	Date	Title CC3100BOOST		
Designer	Texas Instruments	Date			
Drawn By	TI	Date	Size A2	Project No <Project Number>	Rev 4.0A
Layout	TI	Date	Scale	Date Thursday, June 05, 2014	Sheet 2 of 3