

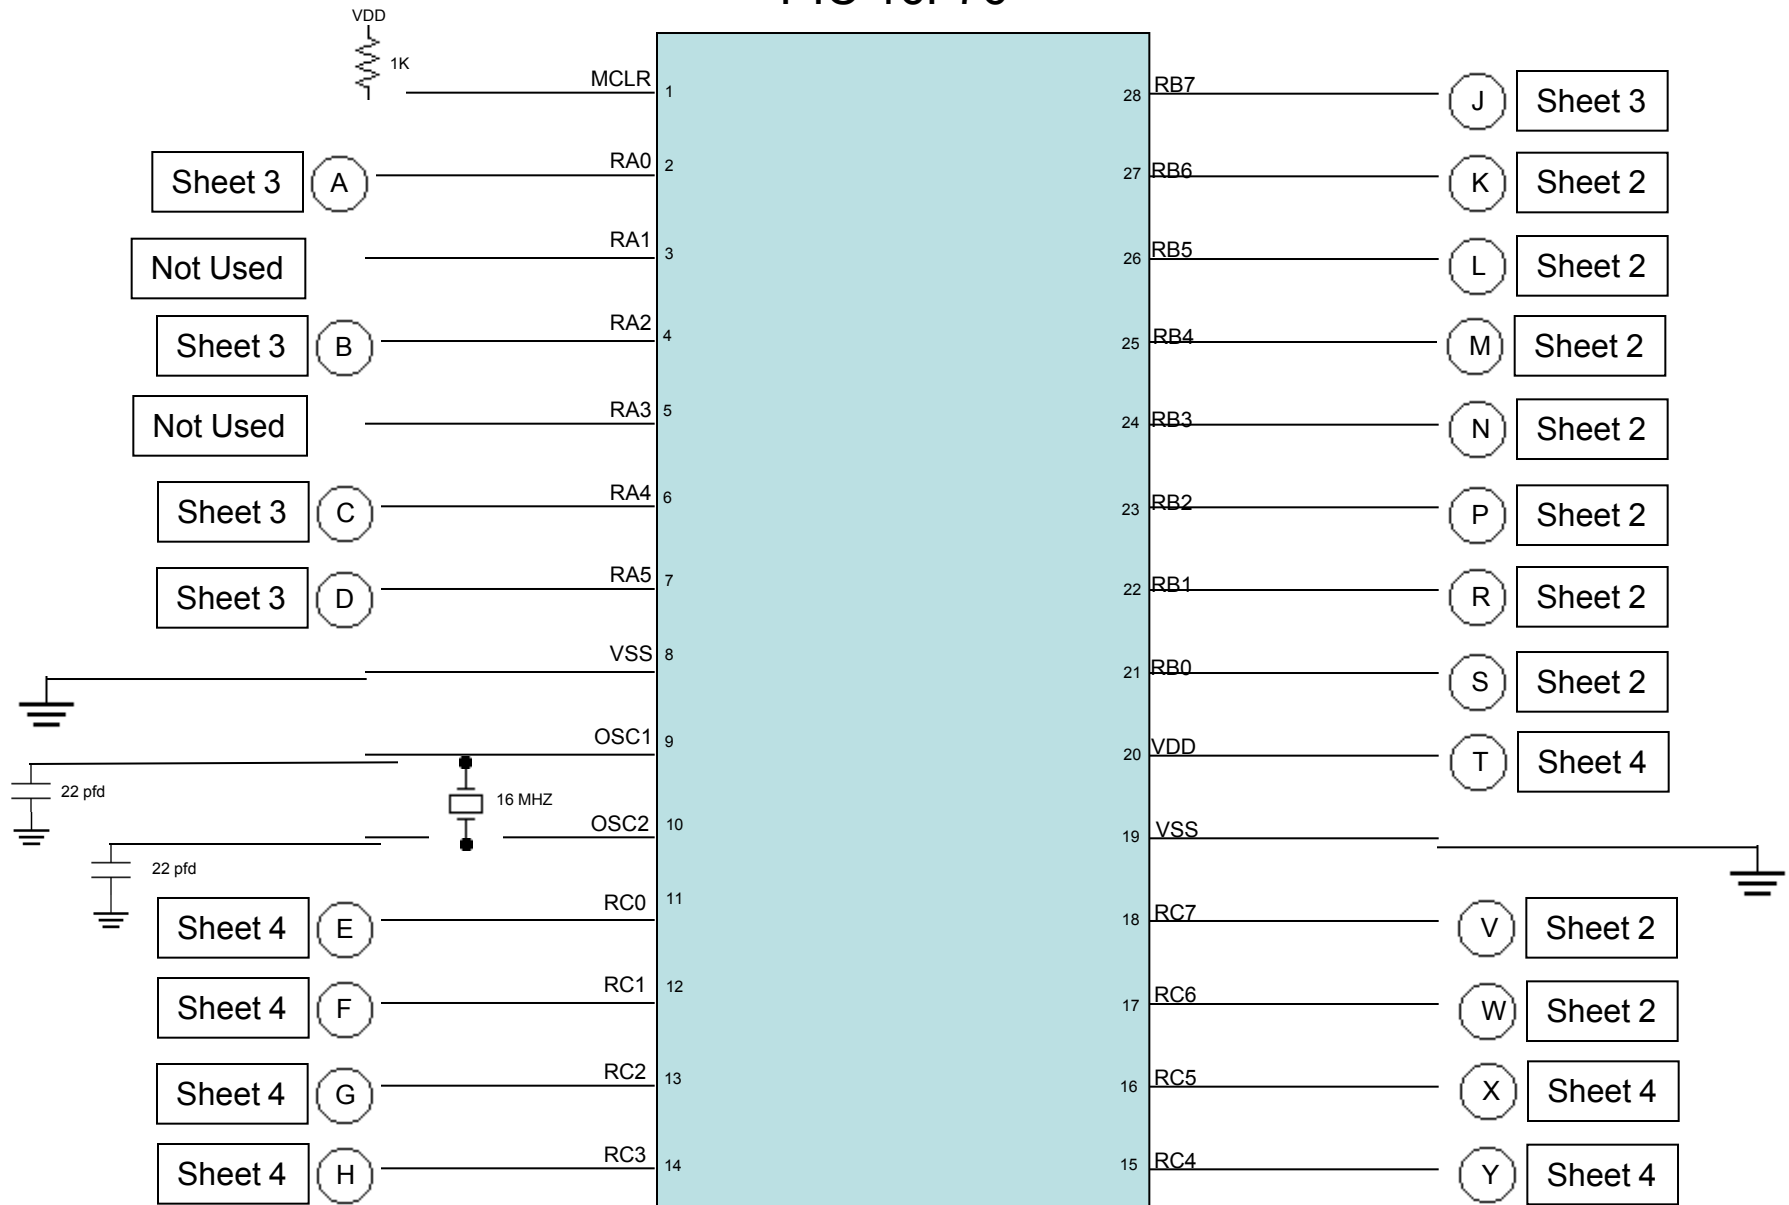
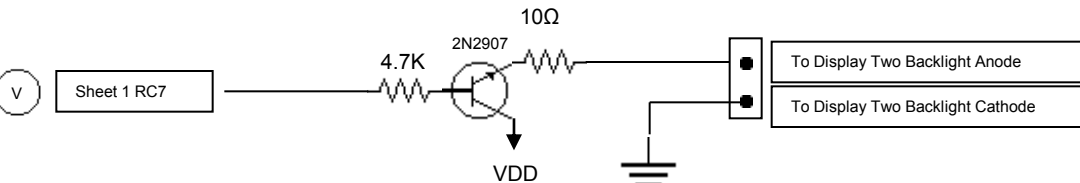




# PIC 16F76

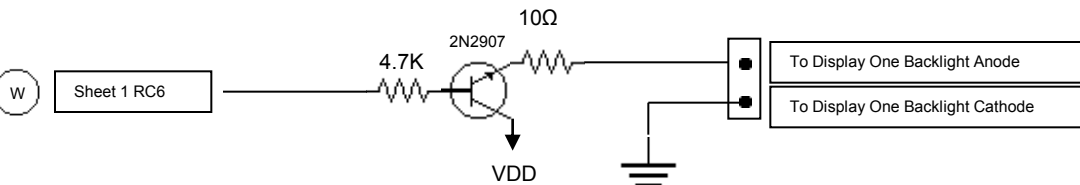




74HC157

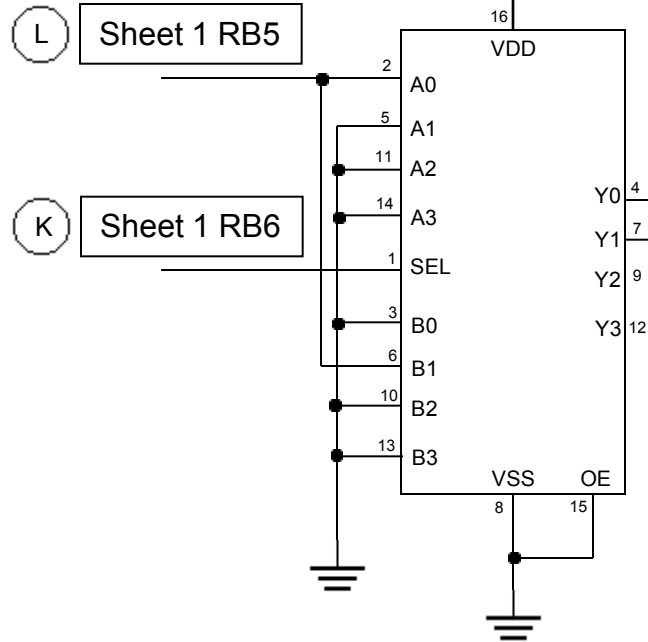

To Inside Display  
# 1

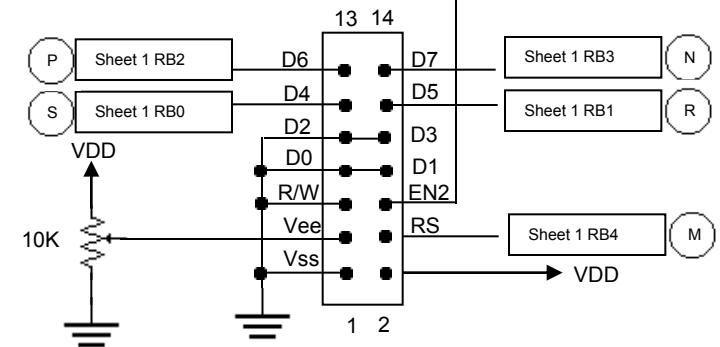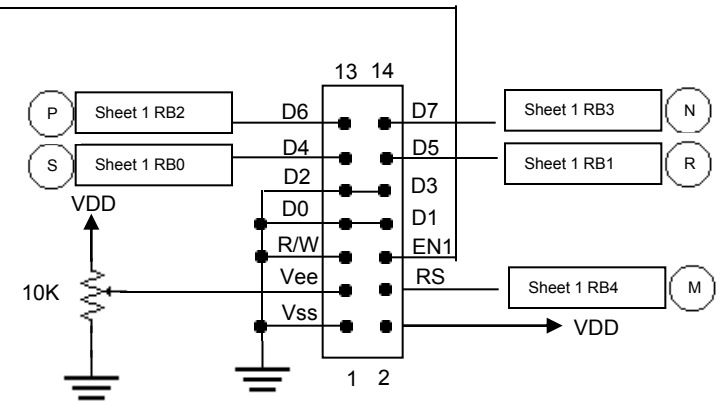


To Outside Display  
# 2

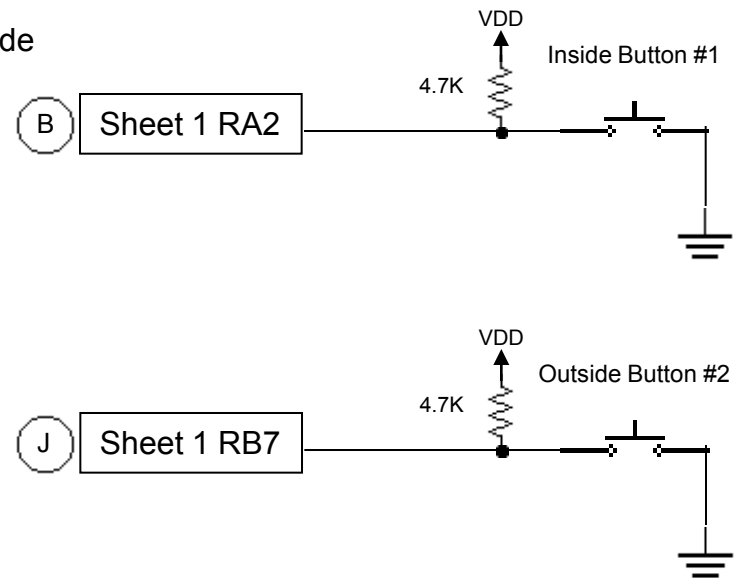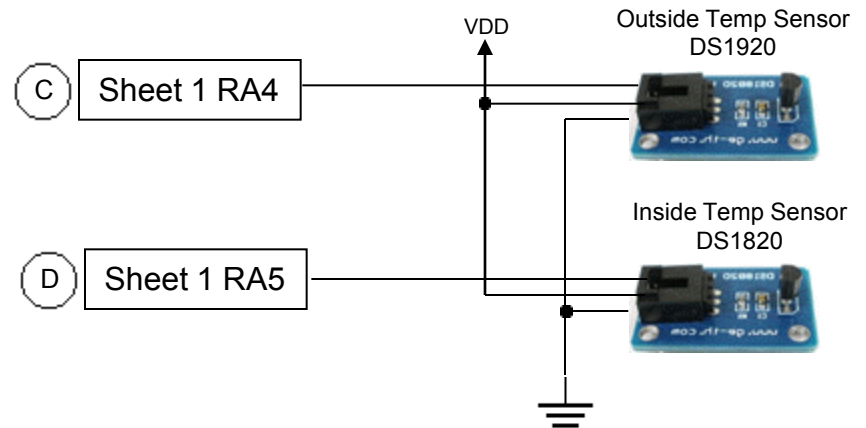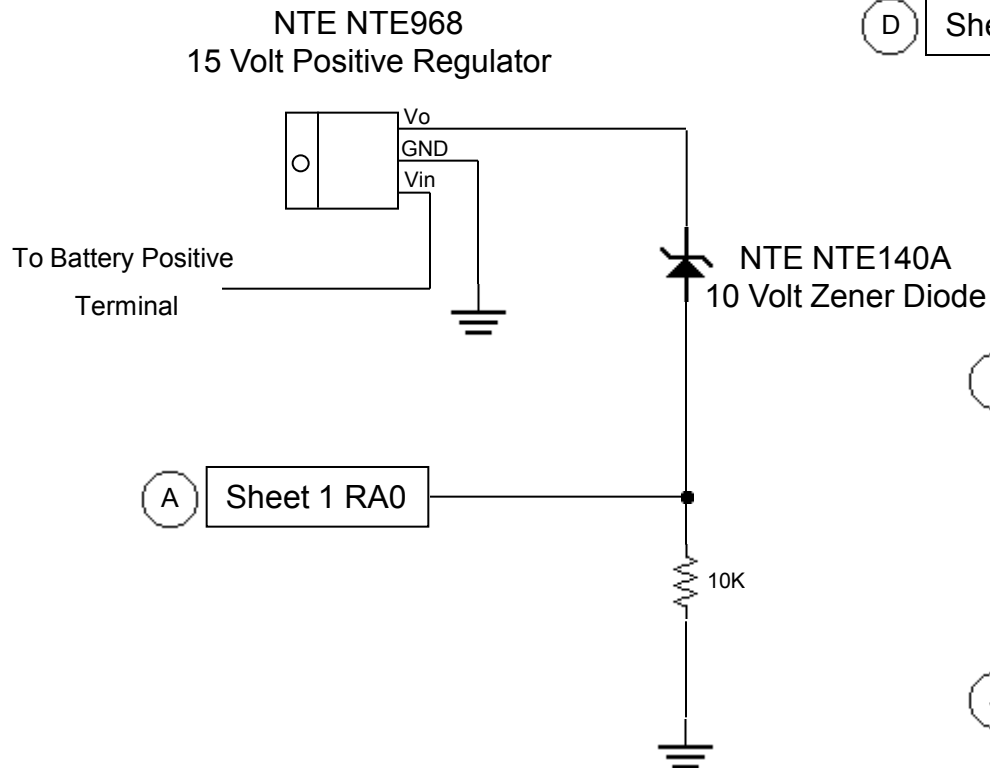

From 12 VDC Source Not Polarity Sensitive


Velleman-kit K2570  
Universal Power Supply Adjustable 1 Amp  
Adjust for 5 VDC Output

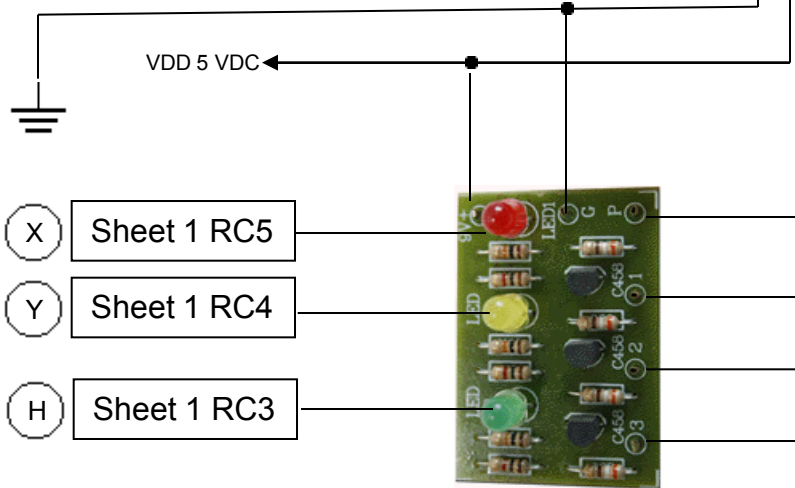

To the Fresh  
Water Tank

Stainless Steel  
Screws into  
The Tank with the wire  
attached serve as  
Sensors

Note: Do not install LED's  
Connect wires to the PIC  
To the Cathode side of the  
LED install pads.

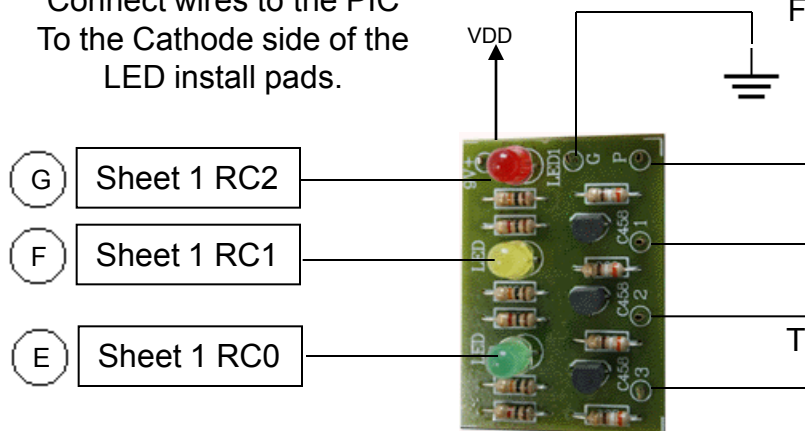

Future Kit Water Level Indicator Code 902

To the Fresh  
Water Tank

Stainless Steel  
Screws into  
The Tank with the wire  
attached serve as  
Sensors

Note: See Documentation for Supplier Assembly Instructions and Schematics

RV Monitoring System  
Sheet 4 © Dick Berry 2013